

JetStream[®]

Air Curtain

The Aleco Energy-Saving JetStream[®] produces a high-speed air barrier, dividing areas into two independent temperature zones. Levels of interior air conditioning/heating are maintained, increasing comfort and saving energy.

- Prevents loss of cool or warm air
- Steel cabinet with durable beige baked enamel finish or stainless steel
- Dust and insect-control
- Protects against entry of smoke and noxious fumes
- Available in 36", 42", 48" and 60" models
- Low 8.5" clearance
- Easy to Install hardware
- All metal blowers



Applications:

- Cold Storage Facilities
- Restaurants
- Warehouse/Distribution Centers
- Food Processing Plants
- Loading Docks
- Supermarkets
- Commercial Front Door Entrances
- Hospitals
- Retail Stores
- Bakeries
- Fast Food Restaurants
- Coolers/Freezers



Available in
Stainless Steel



Aleco JetStream® Features:

- 3-position switch (off/high/low)
- Available in beige baked enamel finish or stainless steel
- UL listed
- Adjustable airflow with directional plenum
- Bracket for mounting
- 5 ft. long 110v prewired grounded plug
- For cooler/freezer use, mount on warm side
- Effective up to 8 ft. heights
- Not recommended for outdoor use



Unit Specifications

ENAMEL COATED MODEL TECHNICAL SPECIFICATIONS										MOTOR SPECIFICATIONS					
Part Number	Unit Size (L x W x H)	Volt/Freq (V/Hz)	Input Power (W)		Avg. Air Velocity	Max Air Velocity	Air Vol. (cfm)		Noise (dB)		Net Weight (lbs)	Current (A)	Power (KW)	RPM	Horsepower
			Hi	Lo			Hi	Lo	Hi	Lo					
475009	36" x 8.5" x 10"	110/60	350	345	2260 FPM	2560 FPM	890	740	60	58	31	3.00	0.35	1400	0.47
475010	42" x 8.5" x 10"		500	495			950	790	60	58	33	3.74	0.50	1400	0.67
475012	48" x 8.5" x 10"		600	595			1365	1135	61	59	37	5.25	0.60	1400	0.80
475015	60" x 8.5" x 10"		670	665			1660	1385	62	60	44	5.75	0.67	1400	0.90



STAINLESS STEEL MODEL TECHNICAL SPECIFICATIONS										MOTOR SPECIFICATIONS					
Part Number	Unit Size (L x W x H)	Volt/Freq (V/Hz)	Input Power (W)		Avg. Air Velocity	Max Air Velocity	Air Vol. (cfm)		Noise (dB)		Net Weight (lbs)	Current (A)	Power (KW)	RPM	Horsepower
			Hi	Lo			Hi	Lo	Hi	Lo					
475018	36" x 8.5" x 10"	110~120/60	500	495	2850 FPM	3150 FPM	1210	990	69	67	43	3.74	0.50	1600	0.67
475021	42" x 8.5" x 10"		650	645			1355	1100	71	69	48	5.40	0.65	1600	0.87
475024	48" x 8.5" x 10"		650	645			1860	1515	73	71	53	5.40	0.65	1600	0.87
475027	60" x 8.5" x 10"		800	795			2325	1890	75	73	62	6.80	0.80	1600	1.00

NOTE: Two units may be wired together for wider openings.



ONE YEAR WARRANTY
Call for details

AIR CURTAIN DIMENSIONS										
Part Number	A	B	C	D	E	F	G	H	I	J
475009	36"	1 3/16"	11 7/16"	22"	—	2"	5 13/16"	10 1/8"	8 1/2"	5 1/4"
475010	42"		11 7/16"	22"	—					
475012	48"		17"	10 5/8"	17"					
475015	60"		22 7/16"	10 5/8"	22 7/16"					

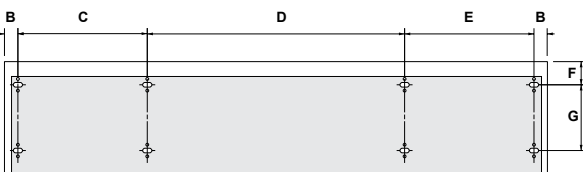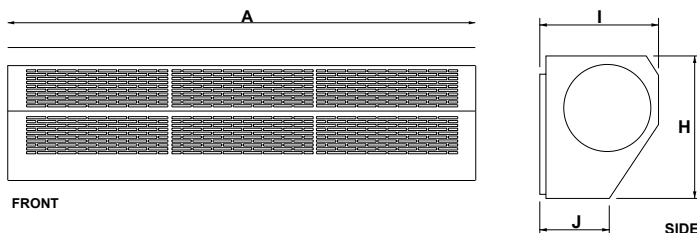

BACK (mounting plate is shaded portion)

INNOVATIVE WORKPLACE SOLUTIONS

STRIP DOORS • IMPACDOR®
INDUSTRIAL PARTITIONS & CURTAINS
AIR CURTAINS • PAN RACK COVERS
FLOOR PROTECTION PRODUCTS



www.aleco.com • email / info@aleco.com
2720 East Avalon Avenue • Muscle Shoals, AL 35661
Ph / (800) 633-3120 • (256) 248-2402
Fax / (800) 750-9616 • (256) 248-2410