

Aleco Order Number: _____


Date: ____ / ____ / ____



IMPACDOR Steel-Lite™

Specifications: 1 1/2" Insulated, Rigid

Please fill out specifications form and send to Aleco. Add dimensions to illustration below. Signature is required before production can begin.

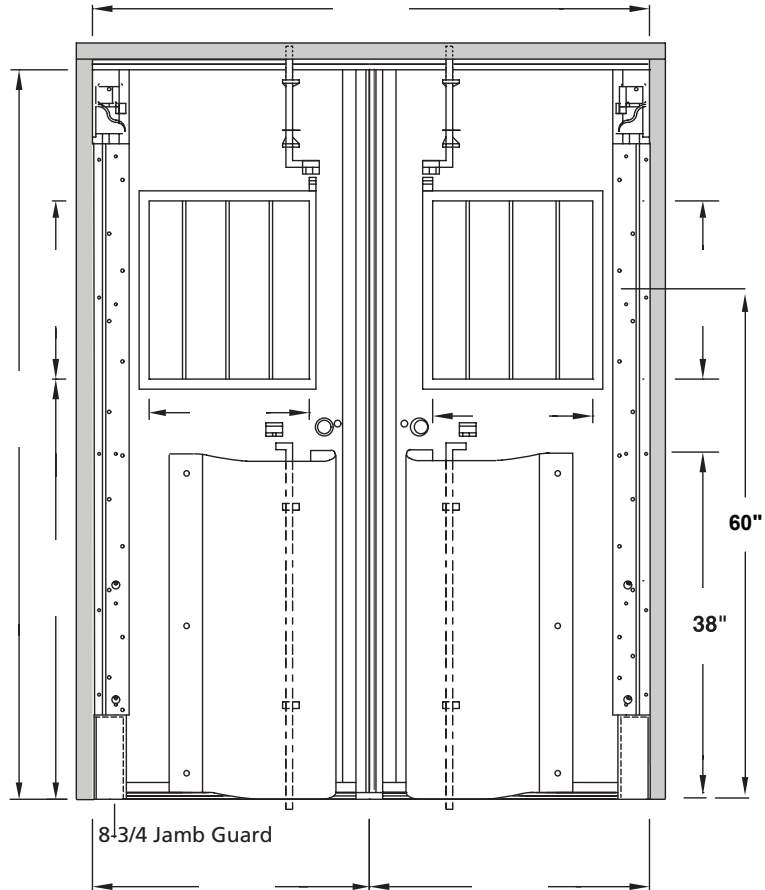

Frame (shaded portion) not included.

IMPORTANT! SIGNATURE REQUIRED BEFORE PRODUCTION



I have reviewed the specifications and authorize Aleco to begin immediate manufacturing of ImpacDor Steel-lite. I understand that this product will be custom made to my order specifications and is non-returnable.

Approved: _____ Date: _____

Company Name: _____ Phone: _____

SPECIAL OPTIONS / NOTES

APPROXIMATE WEIGHT

10 lbs. per sq. ft. X _____ sq. ft. = _____ lbs.

Account Number: _____

Sold To: _____
Address: _____

Purchase Order #: _____

Ship To: _____
Address: _____

Special Markings/Instructions: _____

Quantity: _____ Single or Bi-Parting (check one)

Finished Opening: _____" Wide x _____" High

DOOR FEATURES & OPTIONS

- ▶ 38" high impact, low friction polyethylene bumpers, factory installed
- ▶ Steel cane bolts top and bottom
- ▶ 1/8" thick, double-glazed vision panels. Equipped with 5/8" diameter steel rods
- ▶ 2" I.D. locking bushings with air seals
- ▶ Tamper-proof fasteners
- ▶ Full perimeter air seals
- ▶ Hold open pins
- ▶ 1/8" thick gauge anodized aluminum full height mount assembly

COLOR [] **20 GA. Galvanized door facing with galvanized cam shields is standard**

[] **ABS** (check color below)

Black	Beige	Medium Brown	Cadet Blue
Metallic Gray	Green	Chocolate	Red
Antique White	White	Royal Blue	Cloud Gray
Fudge Brown	Navy	Off White	Gray

WINDOW SIZES (Steel Framed)

- [] **10" x 16"** for door panels less than 36" wide
- [] **17" x 23"** for door panels 36" wide and over

V-CAM OPTIONS 1 1/2" Rise 90° x 90° is standard

JAMB CONSTRUCTION

V-Cam hinge requires a minimum 6 wide x 5/16" thick steel channel jamb or equivalent.

Aleco Part Number: _____