


Aleco Order Number: _____

Date: ____ / ____ / ____

ALECO® IMPACDOR® AIS-175

Specifications: 1-13/16" Solid Core, Semi-Flexible

Please fill out specifications form and send to Aleco. Add dimensions to illustration below. Signature is required before production can begin.

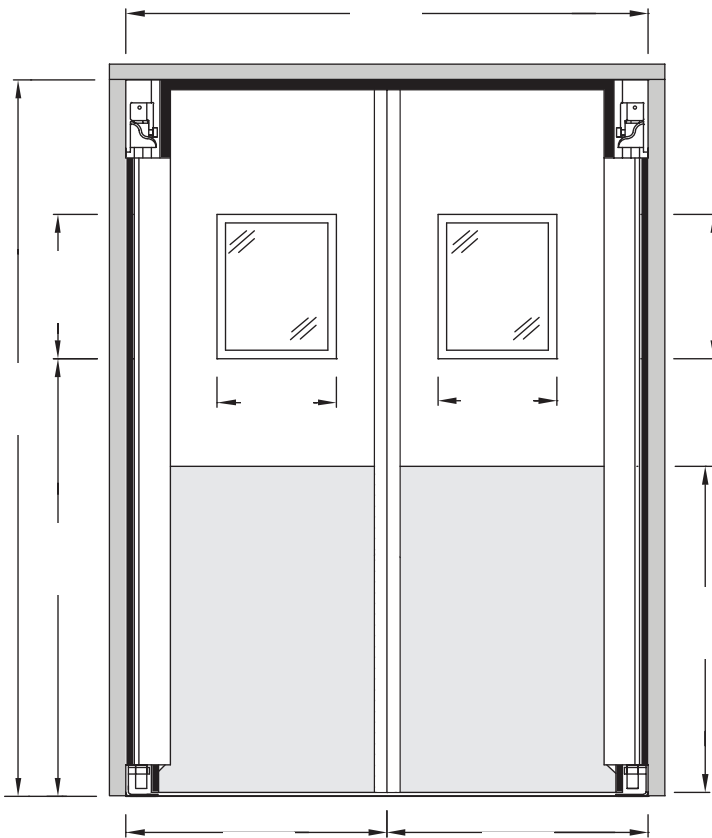

Frame (shaded portion) not included.

IMPORTANT! SIGNATURE REQUIRED BEFORE PRODUCTION



*I have reviewed the specifications and authorize Aleco to begin immediate manufacturing of **ImpacDor AIS-175**. I understand that this product will be custom made to my order specifications and is non-returnable.*

Approved: _____ Date: _____

Company Name: _____ Phone: _____

SPECIAL OPTIONS / NOTES

APPROXIMATE WEIGHT

8.0 lbs. per sq. ft. X _____ sq. ft. = _____ lbs.

Account Number: _____

Sold To: _____

Address: _____

Purchase Order #: _____

Ship To: _____

Address: _____

Special Markings/Instructions: _____

Quantity: _____ Single or Bi-Parting (check one)

Net Opening: _____" Wide _____" High

COLOR

Black

DOOR FEATURES & OPTIONS

TEAR-DROP BUMPERS (POLYETHYLENE)

- 12" High 36" High
- 18" High 42" High
- 24" High 48" High

IMPACT PANELS (POLYETHYLENE)

- 48" High Impact Panels is standard
- No Impact Panels
- 24" High Impact Panels

WINDOW SIZES (Dual Pane)

- 14" x 16" is standard
- 16" x 18" Single Pane
- 24" x 24" Specify Size: _____" W x _____" H

LOWER HINGE

- Bottom bearing is standard

JAMB GUARDS

- 8 3/4" High x 3" Deep Zinc Plated

FOR PRESSURE AND WIND LOADS:

- 4" Light Duty Spring Adjustable Spring Compensator
- 4" Heavy Duty Spring

SEALS Full Perimeter Air Seal is standard

- Jamb & Header Seal Only

V-CAM OPTIONS

- 1 1/2" Rise 90° x 90° is standard
- Deep Seat Cam 90° x 90°
- 1 1/2" Rise 90° x 135°
- 1 1/2" Rise 90° x 180°

JAMB CONSTRUCTION

V-Cam hinge requires a minimum 6" wide x 5/16" thick steel channel jamb.

- WASH DOWN PACKAGE: Teflon Coated Hardware

Aleco Part Number: _____