


Aleco Order Number: _____

Date: ____ / ____ / ____

ALECO[®] IMPACDOR[®] OPTIMA

The world's only one-piece
"flapper style" impact door

Specifications: 1 ply .250 PVC with clear
PVC window.

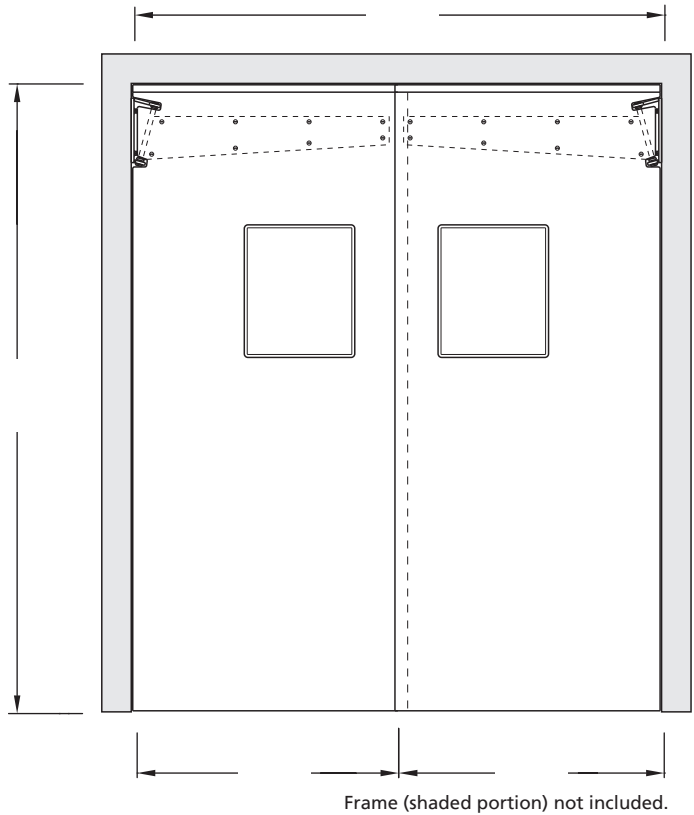

IMPORTANT! SIGNATURE REQUIRED BEFORE PRODUCTION



*I have reviewed the specifications and authorize Aleco to begin immediate manufacturing of **ImpacDor Optima**. I understand that this product will be custom made to my order specifications and is non-returnable.*

Approved: _____ Date: _____

Company Name: _____ Phone: _____

SPECIAL OPTIONS / NOTES

APPROXIMATE WEIGHT

.250 gauge: 2.5 lbs. per sq. ft. X _____ sq. ft. = _____ lbs.

Account Number: _____

Sold To: _____
Address: _____

Purchase Order #: _____

Ship To: _____
Address: _____

Special Markings/Instructions: _____

Quantity: _____ Single or Bi-Parting (check one)

Finished Opening: _____ " Wide X _____ " High

DOOR FEATURES & OPTIONS

PANEL

- .250 (1/4") thick (standard)
- Perimeter Seals (Each kit contains 96" sections, with screws. Indicated number needed.) _____

FORMULATION

- Standard (indoor / outdoor / cooler)

COLOR SELECTION (check one)

Clear, Light Grey, Black, Blue, Green

HINGE

Heavy-duty top mounted gravity hinge, 180° swing, bronze bushings, and solid plate mounting arm.

- Galvanized (standard)
- Stainless Steel

WINDOW

- 15" x 18" is standard.

FIELD MODIFY

May be field modified.

CUSTOM SIZES

Consult factory.

Aleco Part Number: _____