

Aleco Order Number: _____

Date: ____ / ____ / ____

ALECO® IMPACDOR® FD-175

Specifications: 1 3/4" Insulated, Semi-Flexible

Please fill out specifications form and send to Aleco.
Add dimensions to illustration below. Signature is
required before production can begin.

Account Number: _____

Sold To: _____

Address: _____

Purchase Order #: _____

Ship To: _____

Address: _____

Special Markings/Instructions: _____

Quantity: _____ Single or Bi-Parting (circle one)

Net Opening: _____" Wide _____" High

COLOR SELECTION (Circle One)

- Black • Beige • Burgundy • Cadet Blue
- Charcoal Gray • Chocolate • Cloud Gray
- Cocoa • Green • Red • Royal Blue • White

DOOR FEATURES & OPTIONS

SPRING BUMPERS

24" Wide 42" Wide

- 12" High
- 18" High
- 24" High
- 36" High
- 42" High
- 48" High

IMPACT PANELS

_____ " High

- Option:
Wrap Around

LOWER HINGE Bottom Bearing is standard

- 8 3/4" High x 3" Deep Jamb Guard
- Combo Bottom Bearing/Jamb Guard

WINDOW SIZES (Rectangular Dual Pane Screw Mount)

- 14" x 16" is standard
- 7 1/2" x 10 1/2" Single Pane Window
- 11 1/2" x 15 1/2" for Wash Down
- 14" x 16" Specify Size:
- 16" x 18" _____" W _____" H
- 24" x 24"

FOR PRESSURE AND WIND LOADS

- 4" Light Duty Spring 4" Heavy Duty Spring
- Spring Compensator (requires a 8 3/4" jamb guard)

FLEXIBLE TRANSOMS

- Specify Size _____" W _____" H


SEALS Full Perimeter Air Seal is standard

- Jamb & Header Only

V-CAM OPTIONS 3/4" Rise 90° x 90° is standard

- 1 1/2 Rise 90° x 90° Deep Seat Cam 90° x 90°
- 1 1/2 Rise 90° x 125° Spacer
- 1 1/2 Rise 90° x 135° Angle
- 1 1/2 Rise 90° x 180°

Aleco Part Number: _____

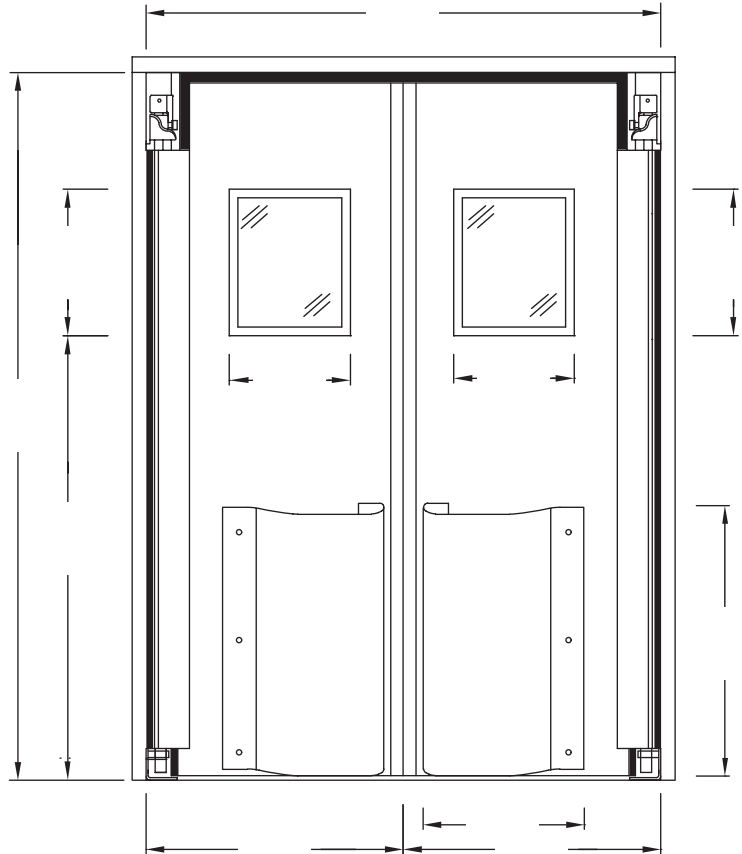

IMPORTANT! SIGNATURE REQUIRED BEFORE PRODUCTION

I have reviewed the specifications and authorize Aleco to begin immediate manufacturing of ImpacDor FD-175.



Approved: _____ Date: _____

Company Name: _____ Phone: _____

SPECIAL OPTIONS / NOTES

APPROXIMATE WEIGHT

7.0 lbs. per sq. ft. X _____ sq. ft. = _____ lbs.