

Aleco Order Number: \_\_\_\_\_

Date: \_\_\_\_ / \_\_\_\_ / \_\_\_\_



Account Number: \_\_\_\_\_

Sold To: \_\_\_\_\_  
Address: \_\_\_\_\_

Purchase Order #: \_\_\_\_\_

Ship To: \_\_\_\_\_  
Address: \_\_\_\_\_

Special Markings/Instructions: \_\_\_\_\_

Quantity: \_\_\_\_\_ Single or Bi-Parting (circle one)

Net Opening: \_\_\_\_\_ " Wide X \_\_\_\_\_ " High

### DOOR FEATURES & OPTIONS

#### PANEL

3/8" crystal clear PVC upper section with gray opaque lower section

#### FORMULATION

- Standard (indoor/outdoor)
- Low-Temp

#### HINGE

Galvanized full-length vertical frame of 13 or 11 gauge wall thickness (depending on overall door size)

#### CLOSING MECHANISM

Adjustable torsion spring. Swings on even plane 180°.

#### FIELD MODIFY


Up to 4" in height and 5" in width.

#### CUSTOM SIZES

Consult factory.

Aleco Part Number: \_\_\_\_\_

Specifications: 3/8" flexible PVC with opaque lower section

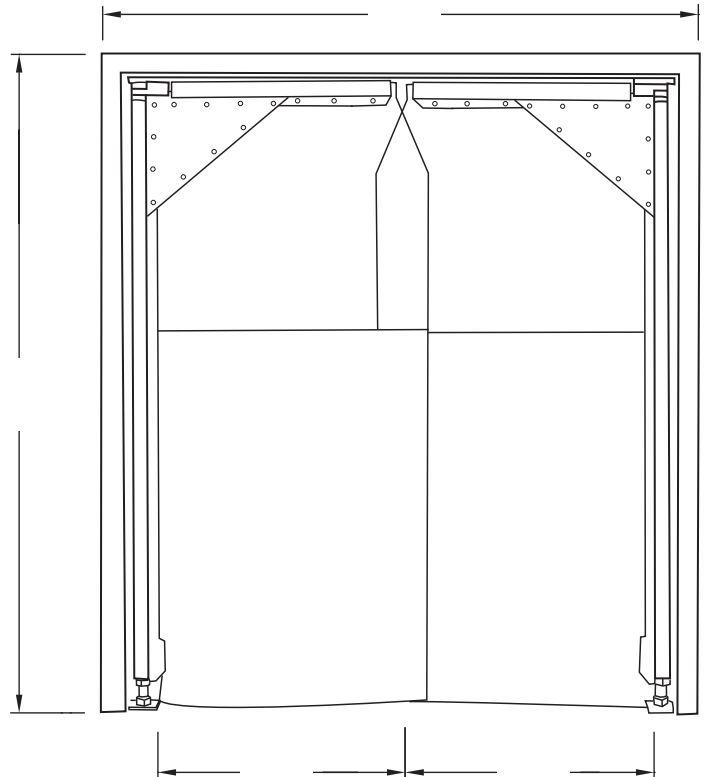

### IMPORTANT! SIGNATURE REQUIRED BEFORE PRODUCTION



*I have reviewed the specifications and authorize Aleco to begin immediate manufacturing of ImpacDor Magna.*

Approved: \_\_\_\_\_ Date: \_\_\_\_\_

Company Name: \_\_\_\_\_ Phone: \_\_\_\_\_

#### SPECIAL OPTIONS / NOTES

\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

#### APPROXIMATE WEIGHT

6.5 lbs. per sq. ft. X \_\_\_\_\_ sq. ft. = \_\_\_\_\_ lbs.