


Aleco Order Number: _____

Date: ____ / ____ / ____

ALECO[®] IMPACDOR[®] OPTIMA[™]

The world's only one-piece
"flapper style" impact door

Specifications: 1 ply .250 or .160 opaque
PVC with clear PVC window.

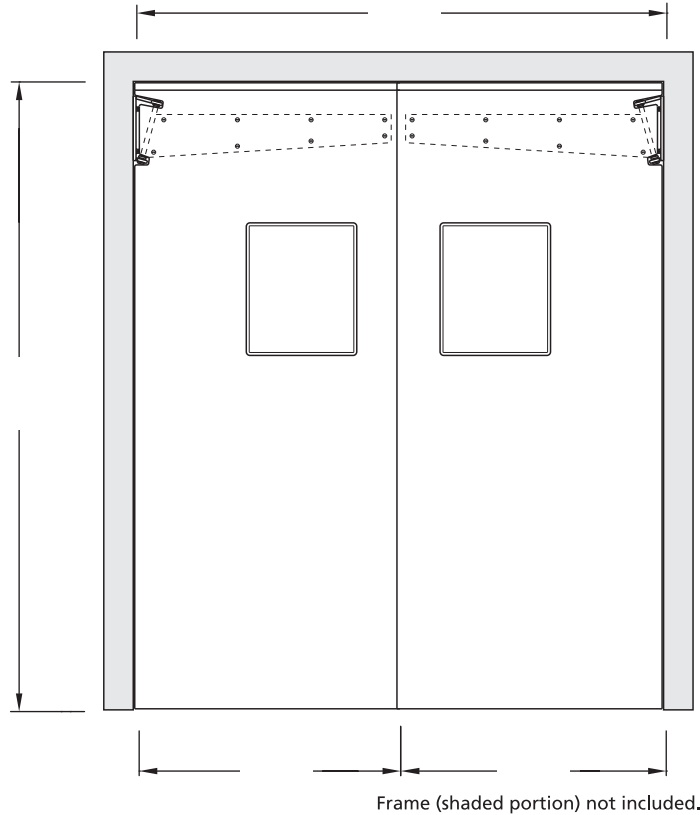

IMPORTANT! SIGNATURE REQUIRED BEFORE PRODUCTION

I have reviewed the specifications and authorize Aleco to begin immediate manufacturing of ImpacDor Optima.



Approved: _____ Date: _____

Company Name: _____ Phone: _____

SPECIAL OPTIONS / NOTES

APPROXIMATE WEIGHT

.250 gauge: 2.5 lbs. per sq. ft. X _____ sq. ft. = _____ lbs.

.160 gauge: 2.0 lbs. per sq. ft. X _____ sq. ft. = _____ lbs.

Account Number: _____

Sold To: _____
Address: _____

Purchase Order #: _____

Ship To: _____
Address: _____

Special Markings/Instructions: _____

Quantity: _____ Single or Bi-Parting (circle one)

Net Opening: _____ " Wide X _____ " High

DOOR FEATURES & OPTIONS

PANEL

- .250 (1/4") thick (standard)
- .160 (5/32") thick (economy)
- Gasket Kit (Each kit contains 88" sections, with screws. Indicated number needed.) _____

FORMULATION

- Standard (indoor/outdoor/cooler)

COLOR SELECTION (circle one)

Beige, Brown, Light Grey, Black, Blue, Green, Red

HINGE

Heavy-duty top mounted gravity hinge, 180° swing, bronze bushings, and solid plate mounting arm.

- Stainless Steel Hinges

WINDOW

- 15" x 18" is standard.

FIELD MODIFY

May be field modified.

CUSTOM SIZES

Consult factory.

Aleco Part Number: _____