

Aleco Order Number: \_\_\_\_\_

Date: \_\_\_\_ / \_\_\_\_ / \_\_\_\_



Account Number: \_\_\_\_\_

Sold To: \_\_\_\_\_  
Address: \_\_\_\_\_

Purchase Order #: \_\_\_\_\_

Ship To: \_\_\_\_\_  
Address: \_\_\_\_\_

Special Markings/Instructions: \_\_\_\_\_

Quantity: \_\_\_\_\_ Single or Bi-Parting (circle one)

Net Opening: \_\_\_\_\_" Wide X \_\_\_\_\_" High

**DOOR FEATURES & OPTIONS**

**PANEL**

3/8" crystal clear PVC is standard

**FORMULATION**

[ ] Standard (indoor/outdoor)

**HINGE**

Galvanized full-length vertical frame of 13 or 11 gauge wall thickness (depending on overall door size) is standard

**CLOSING MECHANISM**

Adjustable torsion spring. Swings on even plane 180°.

**FIELD MODIFY**


Up to 2" in height and 4" in width.

**CUSTOM SIZES**

Consult factory.

Aleco Part Number: \_\_\_\_\_

Specifications: 3/8" flexible PVC, clear

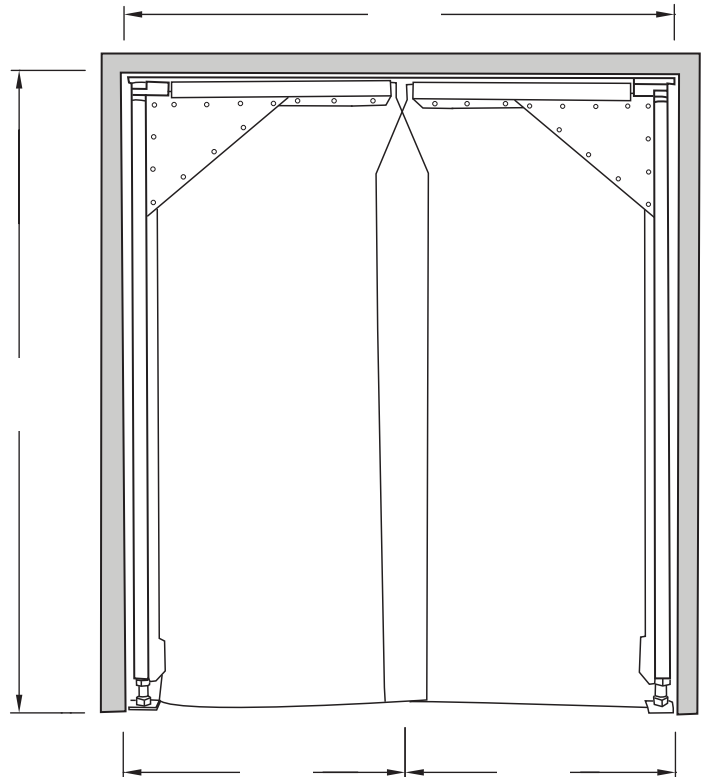

Frame (shaded portion) not included.

**IMPORTANT! SIGNATURE REQUIRED BEFORE PRODUCTION**



*I have reviewed the specifications and authorize Aleco to begin immediate manufacturing of ImpacDor Supra. I understand that this product will be custom made to my order specifications and is non-returnable.*

Approved: \_\_\_\_\_ Date: \_\_\_\_\_

Company Name: \_\_\_\_\_ Phone: \_\_\_\_\_

**SPECIAL OPTIONS / NOTES**

**APPROXIMATE WEIGHT**

6.5 lbs. per sq. ft. X \_\_\_\_\_ sq. ft. = \_\_\_\_\_ lbs.